

REEL STAND

Model PRS-108X80-20

OPERATING FEATURES

- All Wagner-Smith Equipment Co. reel stands feature a disc/hydraulically applied caliper braking system designed for safe, smooth payout.
- Hydraulic power package rewind to allow the operator to rewind conductor via a hydraulic supply when job is completed.
- Quick change type reel and spindle assemblies lift straight out of the unit without having to shift to the side. No tools are required for reel removal.
- Best for Transmission applications

STANDARD FEATURES

- Brake Type Hydraulically applied caliper actuated by a hand pump and valve package.
- Brake Disc 28" diameter ASTM 588 steel
- Air / Hydraulic Booster Max. air supply pressure 100 psi



MODEL PRS-108X80-20 SPECIFICATIONS

UNIT PERFORMANCE - REEL CAPACITY

- Max. Reel Diameter 108"
- Max. Reel Width 80"
- Max. Reel Weight 20,000 lbs.
- Spindle Diameter 5" complete with locking collars


HYDRAULIC POWER REQUIREMENTS

- Flow 20 GPM
- Pressure 2,500 PSI

DIMENSIONS & WEIGHT

- Unit Length 10' 3/4"
- Unit Width 7'6"
- Unit Height 5'11"
- Net Weight 2,200 lbs.

2 3/4" SPINDLE MAX REEL WEIGHTS

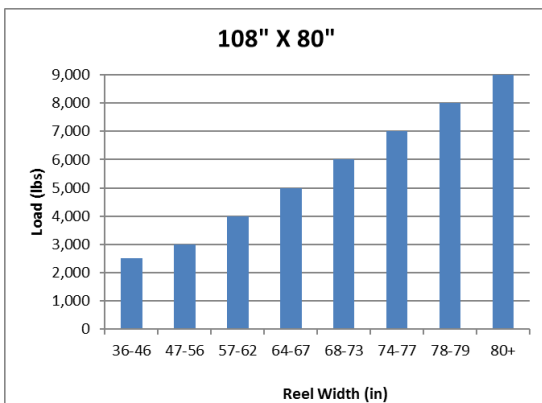

3 1/2" SPINDLE MAX REEL WEIGHTS

